

DSI3200 Rackmount Kit Instructions

This set of instructions guides you through installing a DSI3200 into a standard rack. The rackmount kit contains additional hardware for a various types of racks. Substitute replacement hardware as needed.

1) Select the following contents from the rackmount kit

Black screw X 8




Silver screw X 14




Bar nut X 6



**Slide Assembly
(Left and Right)**



Slide Extenders X 2

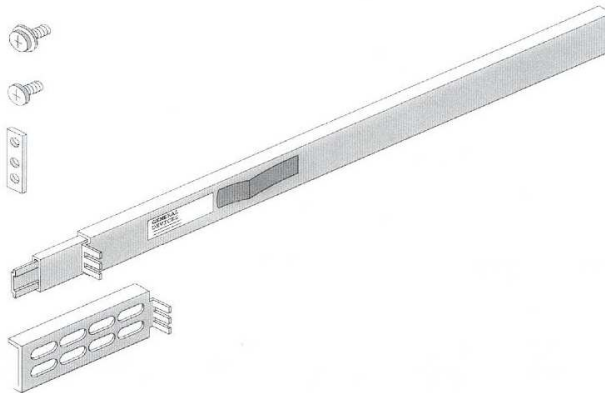


2) Remove inner glides from slide assemblies

Remove the inner glide by sliding it out the front of the slide assembly. Press the spring to release the inner glide.

Keep the left glide with the left slide assembly and vice versa.


Notice: Label facing up

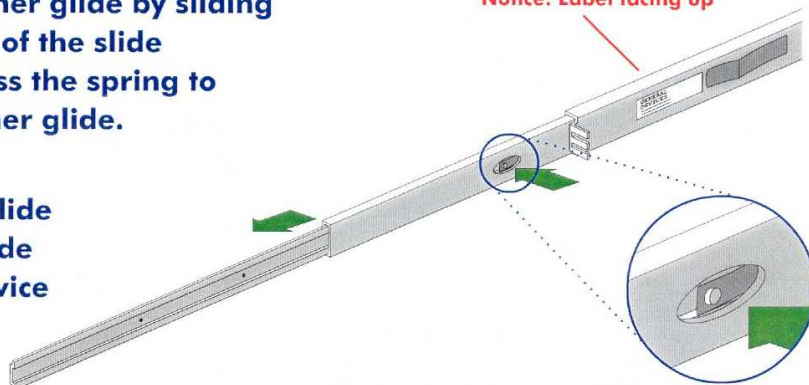

DSI3200 Rackmount Kit Instructions

3) Attach inner glides to the DSI3200


Attach each of the inner glides with five (5) small silver screws.

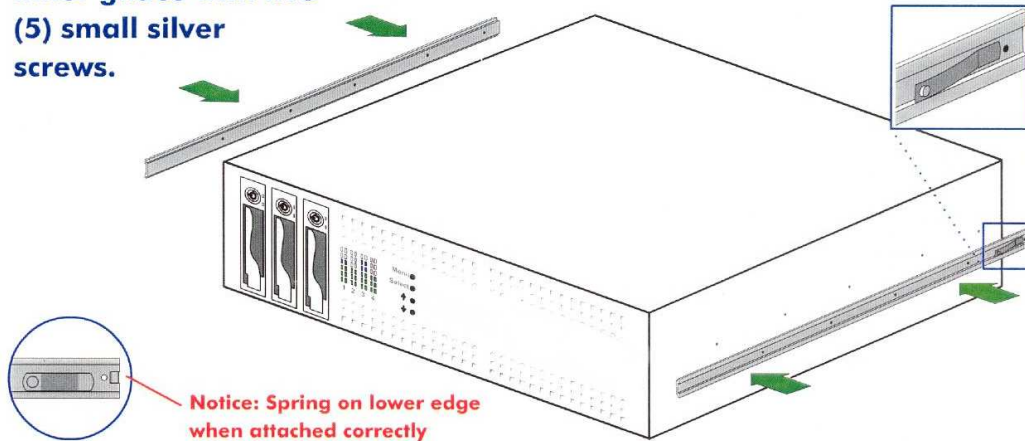

4) Attach slide extenders to slide assemblies

Adjust the placement of the slide extenders to match the depth of the rack.

Attach slide extenders using the small silver screws and bar nut.

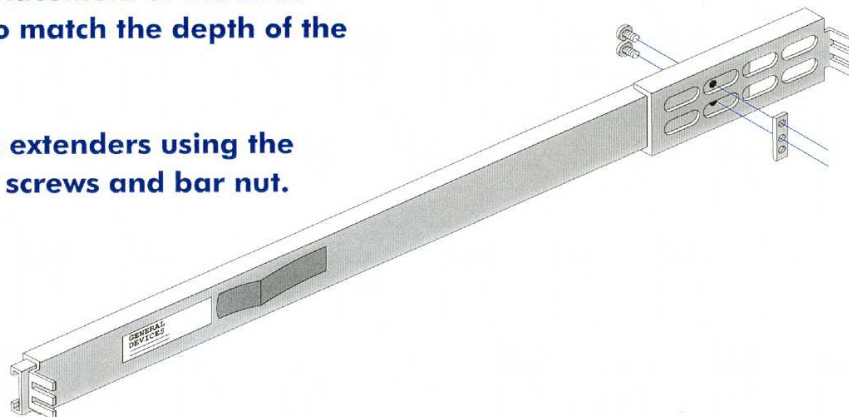


DSI3200 Rackmount Kit Instructions

Page 3 of 3

5) Attach slide assemblies to rack

To attach the outer slide assembly to the rack: feed the black screw through the hole in the rack rails, then through the fingers of the slide assembly, and finally into the bar nut.

In the back of the rack, the fingers may be on the outside of the rails.

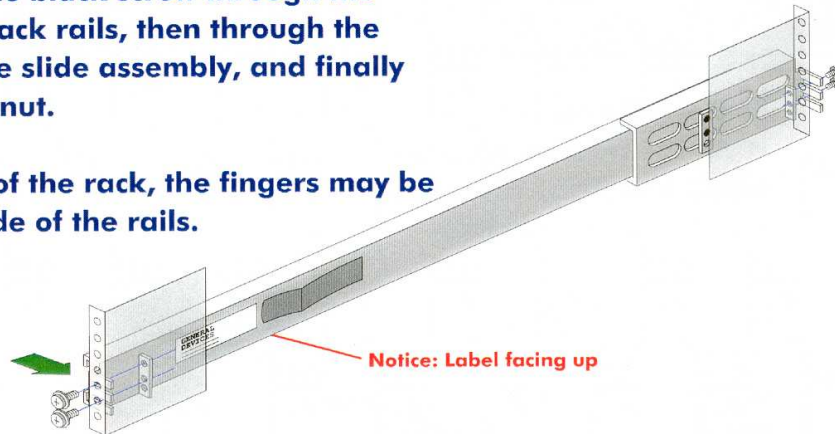

6) Rackmount the DSI3200

Once you have completed steps one through five, slide the **DSI3200's** inner glides into the outer slide assemblies on the rack. Press in the springs on the inner glides to slide the **DSI3200** completely back.

Do not attempt to perform this step alone.